

Research Article

Polymers in the Textiles and in the Construction Industry

Hebah Abdel Wahab^{*} , Tamara Gund

Department of Chemistry and Environmental Science, New Jersey Institute of Technology, Newark, United States

Abstract

Ionic solids, ceramics and most polymers and plastics are insulators, they do not conduct electrical current. Plastics are materials that can be formed into various shapes by the application of pressure or heat. Plastics are classified into thermosetting plastics, thermoplastic material, or an elastomer. A thermosetting plastic cannot be reshaped readily as it's made from an irreversible reaction. Thermoplastic materials can be reshaped, for example polyethylene polymer used in the making of milk containers. Elastomers are plastics with elastic behavior or rubbery plastics, as they can be subject to stretching and bending. Polymers can be either naturally occurring from animals or plants or synthesized in chemical plants or chemical laboratories. This work is aimed to identify the polymers that are used in the textile industry and the polymers used as fill in materials in the construction industry, to find polymers that are less toxic with similar properties as PVC in the textile industry due to the environmental concerns that comes with using PVC, to know whether poly vinyl chloride is still used in the textile industry in the United States, and to find suitable polymers used as fill material in the construction industry.

Keywords

Polymers, Textiles, Types of Polymers, Construction

1. Introduction

An independent business owner in Oxford, PA, USA is looking to possibly manufacture waterproof pants made of a material that has the same look and feel as polyvinyl chloride. He wanted to know whether polyvinyl chloride is still being used in the United States due to the environmental concerns that arouses with using this polymer. Another independent business owner in Olympia, WA, USA is looking for waterproof coatings to encapsulate grinded roof materials in a non-biodegradable chemical compound that would last and not leach chemicals into the ground. He is looking for a fill polymer material to encapsulate the waste grinded roof material.

Materials can be classified according to the forces holding the particles together and it can be also classified according to

their electrical conductivity, the ability to conduct electrical current. Materials are a mixture of substances or a substance that are held together by chemical bonds. Materials can be classified according to the forces holding the molecules into metallic solids, ionic solids, molecular solids and covalent network solids. In molecular solids, the forces between particles can be dispersion forces, dipole-dipole forces, or hydrogen bonding. In covalent network solids, the forces that hold the particles together are covalent bonding. In ionic solids and metallic solids, the forces that hold the particles together are ionic bonding (electrostatic attractions between ions) and metallic bonds representatively. Examples for molecular solids are carbon dioxide (CO₂), and methane (CH₄), examples for covalent network solids are diamond and quartz (SiO₂),

^{*}Corresponding author: heathera@gmail.com (Hebah Abdel Wahab)

Received: 10 May 2024; **Accepted:** 7 June 2024; **Published:** 29 June 2024



Copyright: © The Author(s), 2024. Published by Science Publishing Group. This is an **Open Access** article, distributed under the terms of the Creative Commons Attribution 4.0 License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution and reproduction in any medium, provided the original work is properly cited.


examples for ionic solids are sodium chloride (NaCl) and calcium nitrate ($\text{Ca}(\text{NO}_3)_2$), and examples for metallic solids are sodium (Na), and potassium (K) metals. Materials are classified into conductors, semi-conductors, and insulators according to their ability to conduct electrical current. Ionic solids, ceramics and most polymers and plastics are insulators, they do not conduct electrical current. Metallic solids are conductors as they conduct electrical current at room temperature. Covalent network solids are semi-conductors, they have intermediate electrical conductivity between insulators and conductors. Aluminum oxide (Al_2O_3), silicon carbide (SiC), silicon nitride (Si_3N_4), aluminum oxide, zirconia (ZrO_2), and beryllia (BeO) are examples of ceramic insulating material. Silicon, germanium, tin, and carbon are examples of elemental semi-conductors, and aluminum phosphide (AlP), gallium phosphide (GaP), zinc selenide (ZnSe), and copper (I) bromide (CuBr) are examples of material semi-conductors. Polymers and plastics are high molecular weight substances that are mostly insulators. They can be found in nature or synthesized in the laboratories. Naturally occurring polymers are starch and cellulose, found in plants, and proteins found in both animals and plants. Other examples for naturally occurring polymers are natural rubber, silk, leather, wool. Plastics are materials that can be formed into various shapes by the application of pressure or heat. Plastics are classified into thermosetting plastics, thermoplastic material, or an elastomer. A thermosetting plastic cannot be reshaped readily as it's made from an irreversible reaction. Thermoplastic materials can be reshaped, for example polyethylene polymer used in the making of milk containers. Elastomers are plastics with elastic behavior or rubbery plastics, as they can be subject to stretching and bending. Polymers can be either naturally occurring from animals or plants or synthesized in chemical laboratories or chemical plants. Polypropylene, polyethylene, polyethylene vinyl acetate, polyethylene terephthalate, polyurethane laminate (polyurethane), polyisoprene, nitrile butadiene rubber, natural rubber, Teflon (a fluoropolymer), polyvinyl chloride, paraffin waxes, styrene butadiene rubber, neoprene, polyurethane, PDMS (A Silicone), styrene-acrylic polymers, PE-Polyester Resin, and phenol formaldehyde (a phenolic resin) are well known polymers. [1, 2].

Polymers can be made in the laboratory or in chemical plants by either addition or condensation polymerization. Addition polymerization involves the opening of a double bond in a molecule, and two new C-C bonds are formed with another two molecules as in equation 1:



n = hundreds to thousands of monomer molecules.

In condensation polymerization two molecules are joined to form a larger molecule via a condensation reaction and by the elimination of a small molecule such as a water molecule. Nylon 6, 6 is an example of a copolymer synthesized by condensation polymerization, shown in equation 2.



Polycarbonate, polyurethane, Nylon 6, 6, are examples of copolymers synthesized by condensation polymerization. [1]

Polyvinyl chloride is a thermoplastic that can be either in the rigid or the flexible form, and it has countless industrial and commercial applications. Flexible PVC is used in cable insulation, wiring insulation, roof lining, hoses and conveyor belts. Rigid PVC is used in roofing, electricity distribution boxes, pipes, plug housing, and battery terminals. [2]

Studies show that PVC releases concentrations of toxic substances to the environment as the PVC ages and deteriorates. PVC contains phthalate plasticizer, a harmful chemical additive, and cadmium, calcium, barium and lead heat stabilizers, another harmful additive. CBC press release indicated that it releases carcinogens and harmful chemical substances including phthalate plasticizers and dioxin at every stage of its life cycle. [3]

PVC is considered a hazardous waste, it is a carcinogen, phthalates additives are toxic, phthalate exposure influence prenatal hormone regulation resulting in abnormal development of the brain, it causes pregnancy complications, it causes abnormalities in wildlife species- A lawsuit was filed against EPA, US Environmental protection agency on May 2021 regarding The PVC threat of toxic chemicals released from discarded plastic waste. According to NJ state-2008 law banning from using phthalates in children's toys and not banned from being used in school supplies as of today. Phthalates interfere with children's hormones [4, 5].

2. Experimental

Table 1 lists some polymers, their chemical names, their chemical structures and their usages and applications and its usages in either or both industries.

Polypropylene is used in the fabrication of both cold and warm weather clothing. Undergarments made of polypropylene retain body odors and is the major polymer used for the making of diapers, where the polymer is treated to become hydrophilic and absorb water. [6-8]. It is used for plastic molding, for example bottles, bottle tops and fittings. It is used in roofing as a waterproofing roofing a membrane. It is also used in the production of packaging, storage boxes, and stationary folders. It is used as an alternative to PVC, polyvinyl chloride, as it emits less harmful smoke with no toxic halogens. It is used as a concrete additive to reduce cracking, and it's also added to soil to improve its strength when constructing the foundation of the buildings. [9, 10].

Polyethylene is synthesized from ethylene, and ethylene is mainly obtained from natural gas or petroleum or renewable resources. Polyethylene is not biodegradable and accumulates in landfills causing difficulties for waste management [11, 12]. It is used in furniture, industrial materials, and in textiles. It isn't biodegradable and it ends up in landfills every year. It

can be blended with other fibers for various applications. The uses and applications of polyethylene is based on its type. Polyethylene fibers are classified based on its density values into very-low-density polyethylene with density range of 0.880-0.915 g/cm³, low-density polyethylene with density range of 0.910-0.940 g/cm³, linear low-density polyethylene with density range of 0.915-0.925, medium-density polyethylene with density range of 0.926-0.940, cross-linked polyethylene with medium to high density, high-density polyethylene with density range of 0.941 g/cm³, ultra-high-molecular-weight polyethylene usually has a molecular weight between 3.5 and 7.5 million atomic mass units. Polyethylene is generally used in plastic film applications, packaging, rigid containers, plastic bags, pipes, containers, bottles, waterproof vests, and cables. [13]

Polyethylene vinyl acetate, PEVA, can be used as a safe alternative to PVC as it is not a carcinogen and it also it does not contain chlorine. It has no known effect on human health, living organisms, and like many polymers it is not biodegradable. [14, 15]. It is used as adhesives in bookbinding, binding of metal surfaces, textiles, coated paper, and cement binders. EVA foams known as foam rubber are used as padding equipment in boots, boxing, gloves, helmets, and it's used as a shock absorber in shoes. [16-19]

Polyethylene terephthalate, PETE, is used in fibers for clothing, thermoforming for manufacturing, containers for foods, and resins in engineering after its combination with glass fiber. It is also used as a waterproof barrier in cables, food packaging, thermal insulators, and as a film base. [20-34].

Polyurethane laminate, PUL, is a laminated cloth fabric, in one or both sides with polyurethane thin film. It is used in garment uses, automotive and in medical applications. PUL cloth is soft, flexible, somewhat stretches, breathes and it is a waterproof fabric. It is used in the making of shower curtains, outerwear clothing, tents, waterproof backpacks, mattress protectors, medical bedding, diapers, and cloth menstrual pads. [35-38]

Polyisoprene, in the form of natural rubber or synthetic polyisoprene is mainly used for tires, footwear, belting, hoses, latex products, and condoms. [39]

Nitrile butadiene rubber is used in the preparation of pigment binders and adhesives, synthetic leather, oil seals, transmission belts, and cable jacketing. [40]

Polytetrafluoroethylene is a fluoropolymer containing multiple C-F bonds. It has high resistance to bases, acids, and solvents. It is unreactive and it is used in non-stick coating for cookware, in containers for corrosive chemicals, and as lubricants to reduce wear and friction of machinery. [41-43]

Polyvinyl chloride, PVC, is a white brittle solid, and is the most widely used synthetic polymer after polyethylene and polypropylene, and it comes in either the flexible or the rigid form. The rigid form is used for the making of windows, doors and pipes, plastic bottles, membership cards, and food covering sheets. The flexible form is made flexible by the addi-

tion of plasticizers to the rigid form, for example phthalates. The flexible form is used in imitation leather, cable insulation, flooring, plumbing, and the production of canvas when used with linen and cotton. [44-47].

Paraffin wax, (Petroleum wax), consists of hydrocarbon molecules of 20-40 carbon atoms. It begins to melt at temperatures higher than 37 C. It is used in candles, lubrication, electrical insulators, and in the making of crayons after it's dyed. It also has applications in textiles, in the making of canvas textiles and in construction. [48-52]

Styrene-butadiene rubber, SBR, is a type of synthetic rubber. Various types of SBR are used in the making of car tires, soles, chewing gum, jaskets, and shoe heels. Emulsion styrene-butadiene rubber (latex) is used in building applications as a binding agent and is also used in binding pigmented coatings. It's used as an alternative to PV as it's more durable, increases flexibility, and it's also resistant to emulsifications. [53-55]

Natural rubber can be either uncured, plantation (crepe) or Vulcanized rubber. Uncured rubber is used with cement for insulating, adhesive and friction tape. Plantation rubber is used in footwear and insulating blankets. Vulcanized rubber is used in vehicle tires, pump housing, and piping as it has great resistance to abrasion. Natural rubber accounts for 30% of annual rubber production. [56-59].

Uncured rubber is used for insulating, adhesives, and cement. Crepe rubbers are used in foot ware and insulating blankets. Vulcanized rubber (sulfur treated rubber) has more applications as it makes hard and soft rubber more valuable. Rubber has electrical resistance and is water resistant. Synthetic rubber is made from petrochemicals and is used in the making of latex products. Rubber is used as an additive to cement products to improve its quality. [60-63].

Neoprene is a synthetic rubber formed by the polymerization of Chloroprene. It has various commercial applications. It is used as an electrical insulator, an orthopedic brace, and as a laptop sleeve. It is used in corrosion resistant coatings and in hoses due to its inertness and its resistance to degradation than other natural or synthetic rubber. It is used in noise isolation in power transformers, and as a base for adhesives. It is a better resistance to burning than hydrocarbon-based rubber, makes it suitable for the use as combat facemasks and gloves. It is also used in landfills due to its high burn point of 260 °C (500 °F). [64-67].

Polyurethane (PU) is produced from a variety of starting materials, mainly from the reaction of polyol with isocyanate. The resulting polymers have a variety of applications due to the different chemical structures formed. It includes flexible and rigid forms. PU made from aliphatic isocyanates is used in coatings. PU made from aromatic isocyanates interacts with light causing it to discolor from off-white to yellow then to red. I general polyurethanes hydrolyze by its reaction with moisture of air causing it to degrade. It is also subject to slow microbial degradation due to the action of some enzymes. Pestalotiopsis fungus can cause the biodegradation of PU at

the bottom of landfills. [68-73].




Figure 1. Polyurethane Synthesis from the reaction of a diol with diisocyanate.

PDMS, poly dimethyl siloxane, is a polymer made of $-\text{R}_2\text{Si}-\text{O}-\text{SiR}_2-$, where $\text{R} = \text{CH}_3$ units. They are rubber-like substances used in adhesives, electrical insulation, and lubricants. It has excellent chemical stability and waterproof properties. It's used as an additive to concrete to improve its waterproof properties, and it's also used to restore industrial roofs. It is also used to seal crevices, joints and gaps in buildings. Silicones cure by absorbing moisture from air. [74, 75]

Polyester resins are formed by the reaction of a dibasic organic acid such as maleic anhydride with polyhydric alcohols. The unsaturated polyester resins are used in bulk or sheet molding compounds. Polyester concrete overlay, CPO, made from the reaction of isophthalic acid and high levels of styrene, are used as overlay on bridges and roads. The fiberglass reinforced plastic, the polyester resin reinforced with fiberglass, are used as wall panels in kitchens, restaurants, and restrooms. [76-79].

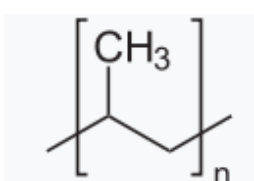
Polyvinyl acetate, PVC, is a type of thermoplastic polymer and it is a type of polyvinyl ester aliphatic polymer. It is known as wood glue, white glue, carpenter's glue, and it is used as adhesive in porous materials such as paper, wood, and cloth. It can be used to consolidate porous building stones. It is used as an envelope, cigarette paper and wallpaper adhesives. It is also used in chewing gum, as gum base. It is used as a raw material to make other polymers, such as, polyvinyl acetate phthalate, PVAP, where the PVC is first hydrolyzed and then reacts with phthalic acid, and polyvinyl alcohol, PVA, where the PVC hydrolyses, partially or completely into PVA. [80-86]


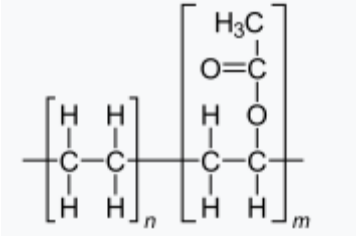
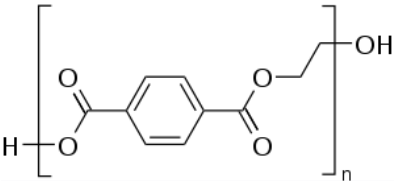
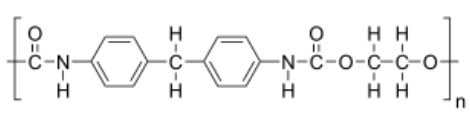
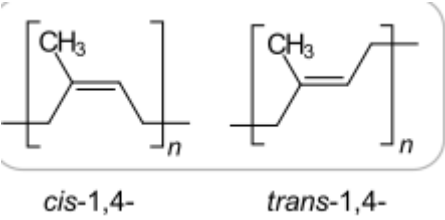

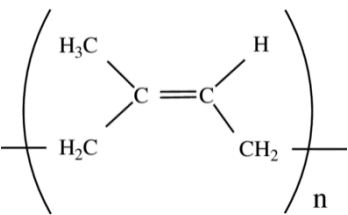
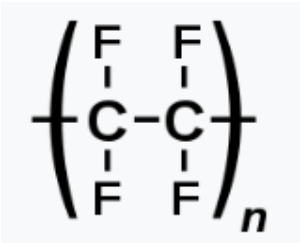
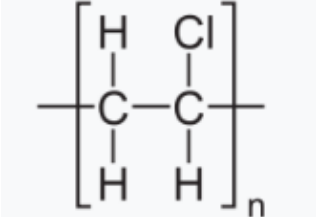
Compared to other acrylic polymers, styrene-acrylic polymers have superior moisture vapor transmission rate and water resistance properties. Low particle size styrene acrylic can be produced due to the styrene monomer being hydro-

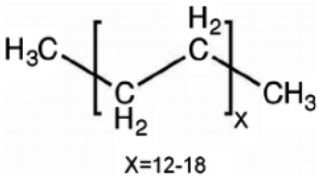
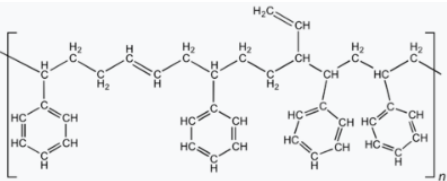
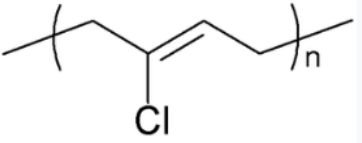
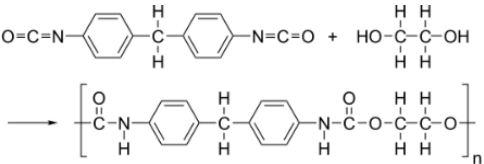
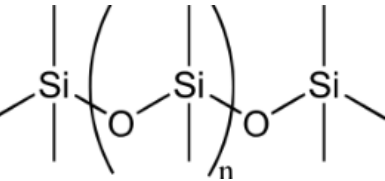
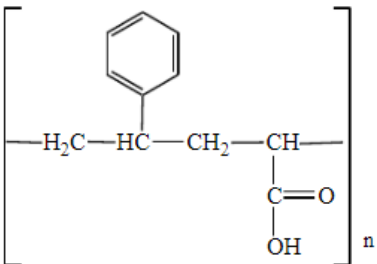
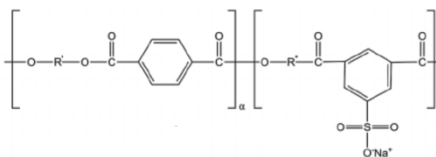
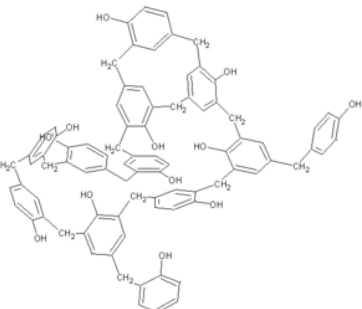
phobic, resulting in applications such as binder for the paper industry and primers for the construction industry. Styrene acrylic polymers have good abrasion resistance, good mechanical properties, and they are durable due to their high glass transition temperature. Additional properties for styrene acrylic emulsion polymers are the ability to crosslink, good stain resistance, resistance to removal by detergents, high pigment binding capacity, film strength, good adhesion to steel and aluminum metals, and wood. The drawback of using styrene acrylic polymers is its yellowing upon exposure to sunlight, the degree of yellowing depends on the amount of styrene present in the polymer. Styrene acrylic polymers are still used in the construction industry as fillers, ceramic tile adhesive, roof coatings despite its drawbacks. They are also used in agriculture and in binding applications, such as wall coverings. [87]

Phenolic resins are produced are synthetic polymers produced from the reaction of formaldehyde with substituted phenols. Phenolic resins are used in countless number of industrial products. Phenolic laminates, a thermostat polymer matrix, are made by saturating layers of paper, cotton, or fiberglass with a phenolic resin, under heat and pressure, the base material type and amounts are based on the application of the finished product. Paper phenolics are used in household laminates, and paper composites. Phenolic resins are used in brake pads, brake, shoes, and clutch desks as a binding agent. Some countertops are made of paper and phenolic resin. Phenolic resins are used in the making of a composite thermosetting resin plastic, known as duroplast. Duroplast is known to be used in the small car industry, Trabant automobile. It is also known to be used in the making of boil and weatherproof plywood (WBP). Phenolic resins are available in both solid and solution form for the ease of its application, as it is used in the industrial coatings industry. [88-91]

Table 1. Polymers, chemical structures and their application.

Chemical Name	Chemical Structure	Usage and Applications
Polypropylene [92]		Diapers, warm and cold weather clothing in textiles and as a concrete additive to increase strength and reduce cracking in the construction industry 2

Chemical Name	Chemical Structure	Usage and Applications
Polyethylene [93]		Textiles and furnishing.
Polyethylene Vinyl Acetate [94]		Adhesives in textiles and cement renders in the construction industry.
Polyethylene Terephthalate [95]		Fibers for clothing in the textile industry.
Polyurethane Laminate (Polyurethane) [96]		Clothing in the textile industry.
Polyisoprene [97]		Textiles and Construction Industry
Nitrile Butadiene Rubber [98]		Textiles
Natural Rubber [99]		Textiles, cement and Construction Industry
Teflon (A Fluoropolymer) [100]		Textiles, and cookware.
Poly vinyl Chloride [101]		Textiles and Construction Industry

Chemical Name	Chemical Structure	Usage and Applications
Paraffin waxes [102, 103]	 <p>X=12-18</p>	Waxed Canvas in Textiles and Construction Industry
Styrene Butadiene Rubber [104]		Construction Industry as a binding agent in building applications.
Neoprene [105]		Wet Suit in Textiles, landfills and Construction Industry
Polyurethane [106]		Shoes Industry. Not recommended its use in the construction industry due to fungal biodegradation.
PDMS (A Silicone) [107]		Polymer cement-based coating in the Construction Industry
Styrene-acrylic polymers [108]		Primer, fillers, roof coatings in Construction Industry & Adhesive in the Paper Industry.
PE-Polyester Resin [109]		Construction Industry
Phenol Formaldehyde (Phenolic resin) [110]		Coatings Industry. Household Laminates. Paper Composites. As an Adhesive or as a binding agent.

3. Conclusions

Polymers used in the textile industry are, polypropylene (PP), polyethylene (PE), polyethylene vinyl acetate (PEVA), Polyethylene Terephthalate (PETE or PET), polyurethane laminate (PUL), polyisoprene, nitrile butadiene rubber (NBR), latex and natural rubber (made from oil secreted from rubber tree), fluoropolymers (PTFE, high performance clothing, and teflon), polyurethane laminate (Polyurethane), and polyurethane. Polypropylene (PP) is favored over polyethylene (PE) due to its durability; they are stronger and lighter than PE. PE do not stretch. Polyethylene vinyl acetate (PEVA)- is considered a non-chlorinated alternative to PVC, and polyurethane laminate (PUL)- soft, flexible, durable, waterproof, wear next to the skin and comfortable. Nitrile butadiene rubber is used in the making of synthetic leather. PUL is similar in properties as PVC with other environmental concerns due to the inclusion of solvents and chemicals and due to its non-biodegradable. Plastic materials similar to PVC are natural rubber, NBR, PUL, polyisoprene, and fluoropolymers (PTFE).

Polymers used in the Construction Industry are styrene butadiene rubber, PDMS (A Silicone), styrene-acrylic polymers, PE-polyester resin and ploy vinyl acetate (PVA), Polyisoprene Natural (NR) and Synthetic (IR), Styrene Butadiene (SBR), Neoprene, Polyurethane, Silicones, Ploy Vinyl Chloride (PVC)+ Ethylene, Styrene-acrylic polymers, PE-Polyester Resin, and Phenolic resins.

Polyisoprene Natural (NR) and Synthetic (IR) have an excellent vibration isolating material. Polyisoprenes are not recommended for high heat, ozone, sunlight, petroleum, or hydrocarbon environments.

Polymers that are used as binders and/ or sealers in the construction industry are Neoprene, Paraffin waxes, Styrene Butadiene (SBR). Silicones, Polypropylene, and Poly Vinyl Chloride (PVA)+ Ethylene. Polymers that are used in industrial coating and waterproofing are Styrene Butadiene (SBR), Polyurethane, Silicones, Styrene-acrylic polymers, PE-Polyester Resin, and Phenolic resins. Neoprene is the material of choice for exterior applications such as profiles used in building seals as it is resistant to oil, wax, and grease, and can withstand temperatures from -50 to 120 °C. It is also resistant to ozone, weathering, and water immersion.

PVC is considered a hazardous waste, it is a carcinogen, phthalates additives are toxic, phthalate exposure influence prenatal hormone regulation resulting in abnormal development of the brain, it causes pregnancy complications, it causes abnormalities in wildlife species- A lawsuit was filed against EPA, US Environmental protection agency on May 2021 regarding The PVC threat of toxic chemicals released from discarded plastic waste. According to NJ state-2008 law banning from using phthalates in children's toys and not banned from being used in school supplies as of today. Phthalates interfere with children's hormones.

PVC was not banned and currently being in the US and

overseas. There is an environmental concern in the discarding of the PVC material, it is considered a hazardous waste, it's a carcinogen, phthalates additives are toxic, phthalate exposure influence prenatal hormone regulation resulting in abnormal development of the brain, it causes pregnancy complications, it causes abnormalities in wildlife species- A lawsuit was filed against EPA, US Environmental protection agency on May 2021 regarding The PVC threat of toxic chemicals released from discarded plastic waste. According to NJ state-2008 law banning from using phthalates in children's toys and not banned from being used in school supplies as of today. Phthalates interfere with children's hormones.

Abbreviations

PDMS	Poly Dimethyl Siloxane
PE	Polyester Resin
PVC	Ploy Vinyl Chloride
EPA	US Environmental Protection Agency
PUL	Polyurethane Laminate
PU	Polyurethane
PVAP	Polyvinyl Acetate Phthalate
PVOH	Polyvinyl Alcohol
PP	Polypropylene
PE	Polyethylene
PEVA	Polyethylene Vinyl Acetate
PETE or PET	Polyethylene Terephthalate
PUL	Polyurethane Laminate
NBR	Nitrile Butadiene Rubber
PTFE	Fluoropolymers
PP	Polypropylene
PE	Polyethylene
PVA	Poly Vinyl Acetate
NR	Polyisoprene Natural

Acknowledgments

We acknowledge the efforts of the Association of Consulting Chemists and Chemical Engineers for making our profiles available for the clients worldwide.

Conflicts of Interest

The authors declare no conflicts of interest.

References

- [1] Chemistry the Central Science 11th edition, Brown, LaMay, Bursten, Murphy. Pearson Publishing, 2009, Upper Saddle River, NJ 07458. ISBN: 0136006175.
- [2] Saybridge Technologies, June 30, 2021, "Know Your Materials: Polyvinyl Chloride (PVC)". Accessed on April 3, from <https://sybridge.com/know-your-materials-polyvinyl-chloride/>

- [3] Lisa Whitley Coleman, May 24, 2022, "PVC Under Scrutiny as Hazardous Waste". Accessed on April 3, 2024, from <https://ehsdailyadvisor.blr.com/2022/05/pvc-under-scrutiny-as-hazardous-waste/>
- [4] State of NJ, Department of Human Services, 2008, "PVC – a major source of phthalates". Accessed on April 2024, from <https://www.nj.gov/humanservices/opmrdd/health/pvc.html#:~:text=PVC%20contains%20dangerous%20chemical%20additives,posing%20unnecessary%20dangers%20to%20children>
- [5] Emily Jeffers, August 19, 2021, "Lawsuit Seeks to Regulate Plastic as Hazardous Waste", Center for Biological Diversity. Accessed on April 2024, from <https://biologicaldiversity.org/w/news/press-releases/lawsuit-seeks-to-regulate-plastic-as-hazardous-waste-2021-08-19/>
- [6] Collinet, Pierre; Belot, Franck; Debodinance, Philippe; Duc, Edouard Ha; Lucot, Jean-Philippe; Cosson, Michel (2006-08-01). "Transvaginal mesh technique for pelvic organ prolapse repair: mesh exposure management and risk factors". *International Urogynecology Journal*. 17 (4): 315–320. <https://doi.org/10.1007/s00192-005-0003-8> ISSN 0937-3462. PMID 16228121. S2CID 2648056.
- [7] UPDATE on Serious Complications Associated with Transvaginal Placement of Surgical Mesh for Pelvic Organ Prolapse: FDA Safety Communication, FDA, July 13, 2011.
- [8] "Film Capacitors". my.execpc.com Retrieved 2012-08-02.
- [9] Bayasi, Ziad & Zeng, Jack (1993). "Properties of Polypropylene Fiber Reinforced Concrete". *ACI Materials Journal*. 90 (6): 605–610. <https://doi.org/10.14359/4439>
- [10] Amir-Faryar, Behzad & Aggour, M. Sherif (2015). "Effect of fibre inclusion on dynamic properties of clay". *Geomechanics and Geoengineering*. 11 (2): 1–10. <https://doi.org/10.1080/17486025.2015.1029013> S2CID 128478509.
- [11] Hadad, D.; Geresh, S.; Sivan, A. (2005). "Biodegradation of polyethylene by the thermophilic bacterium *Brevibacillus borstelensis*". *Journal of Applied Microbiology*. 98 (5): 1093–1100. <https://doi.org/10.1111/j.1365-2672.2005.02553.x> PMID 15836478. S2CID 2977246.
- [12] Tokiwa, Yutaka; Calabia, Buenaventura P.; Ugwu, Charles U.; Aiba, Seiichi (September 2009). "Biodegradability of Plastics". *International Journal of Molecular Sciences*. 10 (9): 3722–3742.
- [13] Alex Assoune, "All you need to know about Polyethylene Fabric", 2024. Retrieved from <https://www.panaprium.comon> March 13, 2024.
- [14] Meng, Tingzhu Teresa (2014). "Volatile organic compounds of polyethylene vinyl acetate plastic are toxic to living organisms". *The Journal of Toxicological Sciences*. 39 (5): 795–802. <https://doi.org/10.2131/jts.39.795> PMID 25242410
- [15] "Safety Data Sheet (SDS) SDS-101 – Ethylene-Vinyl-Acetate" (PDF). February 10, 2014. Archived from the original (PDF) on 27 April 2021. Retrieved 18 April 2020.
- [16] Reyes-Labarta, J. A.; Marcilla, A. (2012). "Thermal Treatment and Degradation of Crosslinked Ethylene Vinyl Acetate-Polyethylene-Azodicarbonamide-ZnO Foams. Complete Kinetic Modelling and Analysis". *Industrial & Engineering Chemistry Research*. 51 (28): 9515–9530. <https://doi.org/10.1021/ie3006935>
- [17] Reyes-Labarta, J.A.; Marcilla, A. (2008). "Differential Scanning Calorimetry Analysis of the Thermal Treatment of Ternary Mixtures of Ethylene Vinyl Acetate, Polyethylene and Azodicarbonamide". *Journal of Applied Polymer Science*. 110 (5): 3217–3224. <https://doi.org/10.1002/app.28802> hdl: 10045/13312.
- [18] Reyes-Labarta, J. A.; Olaya, M. M.; Marcilla, A. (2006). "DSC Study of the Transitions Involved in the Thermal Treatment of Foamable Mixtures of PE and EVA Copolymer with Azodicarbonamide". *Journal of Applied Polymer Science*. 102 (3): 2015–2025. <https://doi.org/10.1002/app.23969> hdl: 10045/24680
- [19] Mills, N. J. (2003). "Running shoe materials". In Jenkins, Mike (ed.). *Materials in Sports Equipment. Vol. 1. Cambridge: Woodhead Publishing*. pp. 74, 76. ISBN 9781855738546. Retrieved 2018-11-11.
- [20] Whinfield, J. R. (May 1953). "The Development of Terylene". *Textile Research Journal*. 23 (5): 289–293. <https://doi.org/10.1177/004051755302300503> S2CID 137314779.
- [21] The name Terylene was formed by inversion of (polyeth)ylene (terephthalate) and dates to the 1940s. Oxford Dictionary. Terylene was first registered as a UK trademark in April 1946. [citation needed] UK Intellectual Property Office UK00000646992.
- [22] Pasbrig, Erwin (29 March 2007), Cover film for blister packs, retrieved 20 November 2016.
- [23] Mishra, Munmaya (17 December 2018). *Encyclopedia of Polymer Applications*, 3 Volume Set. CRC Press. ISBN 978-1-351-01941-5.
- [24] Ashurst, P.; Hargitt, R. (26 August 2009). *Soft Drink and Fruit Juice Problems Solved*. Elsevier. ISBN 978-1-84569-706-8.
- [25] "COVEME PHOTOVOLTAIC Backsheets and Frontsheets for PV modules" (PDF). Retrieved 4 March 2022.
- [26] "Rynite PET Design Guide" (PDF). DuPont. Retrieved 4 March 2022.
- [27] SIPA: Lightweight compressed gas cylinders have plastic liners / PET provides high oxygen barrier <https://www.plasteurope.com> 18 November 2014, retrieved 16 May 2017.
- [28] Santana, Leonardo; Alves, Jorge Lino; Sabino Netto, Aurélio da Costa; Merlini, Claudia (6 December 2018). "Estudo comparativo entre PETG e PLA para Impressão 3D através de caracterização térmica, química e mecânica". *Matéria (Rio de Janeiro) (in Portuguese)*. 23: e12267. <https://doi.org/10.1590/S1517-707620180004.0601> ISSN 1517-7076.

- [29] Bow, J. K.; Gallup, N.; Sadat, S. A.; Pearce, J. M. (15 July 2022). "Open source surgical fracture table for digitally distributed manufacturing". *PLOS ONE*. 17 (7): e0270328. <https://doi.org/10.1371/journal.pone.0270328> ISSN 1932-6203. PMC 9286293. PMID 35839177.
- [30] Valvez, Sara; Silva, Abilio P.; Reis, Paulo N. B. (2022). "Optimization of Printing Parameters to Maximize the Mechanical Properties of 3D-Printed PETG-Based Parts". *Polymers*. 14 (13): 2564. <https://doi.org/10.3390/polym14132564> ISSN 2073-4360. PMC 9269443. PMID 35808611.
- [31] Barrios, Juan M.; Romero, Pablo E. (January 2019). "Improvement of Surface Roughness and Hydrophobicity in PETG Parts Manufactured via Fused Deposition Modeling (FDM): An Application in 3D Printed Self-Cleaning Parts". *Materials*. 12 (15): 2499. <https://doi.org/10.3390/ma12152499> ISSN 1996-1944. PMC 6696107. PMID 31390834.
- [32] Jump up to:^{a b} Green, Dannielle Senga; Jefferson, Megan; Boots, Bas; Stone, Leon (15 January 2021). "All that glitters is litter? Ecological impacts of conventional versus biodegradable glitter in a freshwater habitat". *Journal of Hazardous Materials*. 402: 124070. <https://doi.org/10.1016/j.jhazmat.2020.124070> ISSN 0304-3894.
- [33] Street, Chloe (6 August 2018). "61 UK festivals are banning glitter - make the switch to eco sparkle". *Evening Standard*. Retrieved 25 March 2023.
- [34] Teijin. "Teijin Develops Eco-friendly Wet-strong Printing Paper Made 100% with Recycled Polyester Derived from Used PET Bottles". *Teijin Group*. Archived from the original on 25 August 2013. Retrieved 12 March 2013.
- [35] Kayarchy - the sea kayaker's online handbook and reference, "Clothing and Tow belt (2)", 2024. Retrieved on March 13, 2024, from <https://www.kayarchy.com/>
- [36] Stance Healthcare, "A Guide to Polyurethane Upholstery Fabrics", 2022. Retrieved on March 13, 2024, from <https://www.stancehealthcare.com/>
- [37] C. Geoff (13 March 2022). "The Definitive Guide that You Never Wanted: Backpack Fabrics". *Medium*. Retrieved 18 June 2022.
- [38] "What is PUL?". www.greenandhappymom.com Retrieved 2021-07-22.
- [39] "Non-Latex Condoms to Avoid Latex Allergies". Cleveland Clinic. 15 October 2020. Retrieved 27 November 2022.
- [40] Zerka, Sam (23 January 2012). "What is Nitrile?". Lab Supply Blog. Harmony.
- [41] "poly (tetrafluoroethylene) (CHEBI:53251)". ebi.ac.uk Retrieved 12 July 2012.
- [42] "PTFE". *Microwaves101*. Archived from the original on 16 July 2014. Retrieved 16 February 2012.
- [43] "The History of Teflon Fluoropolymers". Teflon.com. Retrieved 3 February 2021.
- [44] "Poly (vinyl chloride)". *MilliporeSigma*. 2022. Archived from the original on 11 October 2022. Retrieved 11 October 2022.
- [45] "What is PVC" Archived 18 July 2017 at the Wayback Machine- Retrieved 11 July 2017.
- [46] Allsopp, M. W.; Vianello, G. (2012). "Poly (Vinyl Chloride)". *Ullmann's Encyclopedia of Industrial Chemistry*. Weinheim: Wiley-VCH. https://doi.org/10.1002/14356007.a21_717
- [47] W. V. Titow (31 December 1984). *PVC technology*. Springer. pp. 6-. ISBN 978-0-85334-249-6. Archived from the original on 26 May 2013. Retrieved 6 October 2011.
- [48] Freund, Mihály; Mózes, Gyula (1982). *Paraffin products: properties, technologies, applications*. Translated by Jakab, E. Amsterdam, the Netherlands: Elsevier. p. 121. ISBN 978-0-444-99712-8.
- [49] Raw materials and candles production processes Archived 21 March 2020 at the Wayback Machine, AECM.
- [50] Charles B. Willingham; William J. Taylor; Joan M. Pignocco; Frederick D. Rossini. "Research Paper RP1670 | Vapor Pressures and Boiling Points of Some Paraffin, Alkylcyclopentane, Alkylcyclohexane and Alkylbenzene Hydrocarbons" (PDF). National Institute of Standards and Technology. US Department of Commerce National Bureau of Standards.
- [51] "History of Candles". *National Candle Association*. Retrieved 25 February 2016.
- [52] "Paraffin, n". Oxford English Dictionary. Oxford, England: Oxford University Press. March 2009.
- [53] Steven Di Pilla (2 June 2004), Slip and Fall Prevention: A Practical Handbook, CRC, p. 82, ISBN 978-0-203-49672-5.
- [54] Market Study Synthetic Rubber "Marktstudie Synthetische Elastomere von Ceresana". Archived from the original on 2015-03-18. Retrieved 2013-08-23., published by Ceresana, June 2013.
- [55] McKeen, L., W., 2013, The Effect of UV Light and Weather on Plastics and Elastomers (Third Edition), William Andrew Publishing, Pages 299-370, ISBN 9781455728510
- [56] Ahmad J, Zhou Z, Majdi A, Alqurashi M, Deifalla AF. Overview of Concrete Performance Made with Waste Rubber Tires: A Step toward Sustainable Concrete. *Materials* (Basel). 2022 Aug 11; 15(16): 5518. <https://doi.org/10.3390/ma15165518> PMID: 36013653; PMCID: PMC9410276.
- [57] VULKAN Couplings System Competence – Compound Research, archived from the original on 11 December 2021, retrieved 9 June 2021.
- [58] Inpart, 2024, "Natural Rubber (NR)", accessed on March 25, 2024, from, <https://inpart24.com/>
- [59] Liu, Luqing; Wang, Chaohui; Liang, Qing; Chen, Feng; Zhou, Xiaolei (15 March 2023). "A state-of-the-art review of rubber modified cement-based materials: Cement stabilized base". *Journal of Cleaner Production*. 392: 136270. <https://doi.org/10.1016/j.jclepro.2023.136270> ISSN 0959-6526.

- [60] Horath, Larry (2017). Fundamentals of Materials Science for Technologists: Properties, Testing, and Laboratory Exercises, Second Edition. Waveland Press. ISBN 978-1-4786-3518-5.
- [61] Yamano, M., Yamamoto, Y., Saito, T., Kawahara, S., Preparation and characterization of vulcanized natural rubber with high stereoregularity, Polymer, Volume 235, 2021, 124271, ISSN 0032-3861, <https://doi.org/10.1016/j.polymer.2021.124271>
- [62] "Rubber Faqs". Archived from the original on 13 September 2016.
- [63] New Atlas, 2024, "Scientists Create Quality Concrete with 100% tire-rubber Aggregate", accessed on March 25, 2024, from, <https://newatlas.com/>
- [64] Werner Obrecht, Jean-Pierre Lambert, Michael Happ, Christiane Oppenheimer-Stix, John Dunn and Ralf Krüger "Rubber, 4. Emulsion Rubbers" in Ullmann's Encyclopedia of Industrial Chemistry, 2012, Wiley-VCH, Weinheim. https://doi.org/10.1002/14356007.o23_o01
- [65] "Technical information — Neoprene" (PDF). Du Pont Performance Elastomers. October 2003. Archived from the original (PDF) on 2008-08-29. Retrieved 2008-02-06.
- [66] "Neoprene - polychloroprene". DuPont Elastomers. Archived from the original on 2008-01-11. Retrieved 2008-04-09.
- [67] "3E Protect" (PDF). MSDS.DuPont.com. Retrieved 14 October 2017.
- [68] Gama, Nuno; Ferreira, Artur; Barros-Timmons, Ana (27 September 2018). "Polyurethane Foams: Past, Present, and Future". Materials. 11 (10): 1841. Bibcode: 2018Mate...11.1841G. <https://doi.org/10.3390/ma11101841> PMC 6213201. PMID 30262722.
- [69] 69."Discoloration of polyurethane foam" (PDF). Foamex Information sheet. Archived from the original (PDF) on 2010-09-24. Retrieved 2010-09-26.
- [70] Valentine, C.; Craig, T. A.; Hager, S. L. (1993). "Inhibition of the Discoloration of Polyurethane Foam Caused by Ultraviolet Light". Journal of Cellular Plastics. 29 (6): 569–88. <https://doi.org/10.1177/0021955X9302900605> S2CID 208363195.
- [71] "Hydrolysis, The Crumbling of Shoe Soles explained | Safety Shoes and Gloves". www.safetyjogger.com
- [72] Russell, J. R.; Huang, J.; Anand, P.; Kucera, K.; Sandoval, A. G.; Dantzer, K. W.; Hickman, D.; Jee, J.; Kimovec, F. M.; Koppstein, D.; Marks, D. H.; Mittermiller, P. A.; Nunez, S. J.; Santiago, M.; Townes, M. A.; Vishnevetsky, M.; Williams, N. E.; Vargas, M. P. N.; Boulanger, L.-A.; Bascom-Slack, C.; Strobel, S. A. (2011). "Biodegradation of Polyester Polyurethane by Endophytic Fungi". Applied and Environmental Microbiology. 77 (17): 6076–84. Bibcode: 2011ApEnM..77.6076R. <https://doi.org/10.1128/AEM.00521-11> PMC 3165411. PMID 21764951.
- [73] "Could Plastic-Eating Mushrooms Solve mankind's Plastic Problem?". Sciencemint. 2021-04-14. Retrieved 2021-07-02.
- [74] Shuo Lu, Piqu Zhao, Chen Liang, Lele Liu, Zichen Qin, Shoude Wang, Pengkun Hou, Lingchao Lu, Utilization of Polydimethylsiloxane (PDMS) in polymer cement-based coating to improve marine environment service performance, Construction and Building Materials, Volume 367,2023,130359, ISSN 0950-0618.
- [75] Wikipedia, the free encyclopedia, 2024, "Silicone", accessed on March 25, 2024, from <https://en.wikipedia.org/wiki/Silicone>
- [76] Lewarchik, Ron (2022-09-14). "Functional Polyester Resins for Coatings". Prospector Knowledge Center. Retrieved 2022-09-21.
- [77] "8-5 Overlays on Existing Bridge Decks" (PDF).
- [78] "2K Polymer Systems Ltd: Bonded Anchors: P - Polyester". www.2kps.net Retrieved 2018-04-05.
- [79] "Polyester Resins". Retrieved 2019-08-19.
- [80] Murray, G. T. (1997), Handbook of materials selection for engineering applications, CRC Press, p. 242, ISBN 978-0-8247-9910-6.
- [81] Young, M. E.; Murray, M.; Cordiner, P. (1999). "Stone consolidants and chemical treatments in Scotland". Robert Gordon University, Building Research Establishment and Historic Scotland. Archived from the original on 2016-11-17. Retrieved 2009-07-30.
- [82] "The Conservation of the Archimedes Palimpsest". The Walters Art Museum. 2011. Retrieved February 22, 2018.
- [83] Amann, Manfred; Minge, Oliver (2012). "Biodegradability of Poly (vinyl acetate) and Related Polymers". Advances in Polymer Science. 245: 137–172. https://doi.org/10.1007/12_2011_153 ISBN 978-3-642-27153-3.
- [84] Coggins, Christopher R. E.; Jerome, Ann M.; Lilly, Patrick D.; McKinney, Willie J.; Oldham, Michael J. (2013). "A comprehensive toxicological evaluation of three adhesives using experimental cigarettes". Inhalation Toxicology. 25 Suppl 2: 6–18. <https://doi.org/10.3109/08958378.2013.854430> ISSN 1091-7691. PMID 24341843. S2CID 6414435.
- [85] Van den Berg, G. (2002-01-01), "Dutch-Type Cheeses", in Roginski, Hubert (ed.), Encyclopedia of Dairy Sciences, Oxford: Elsevier, pp. 371–378, ISBN 978-0-12-227235-6, retrieved 2021-12-10.
- [86] H. Staudinger, K. Frey, W. Stark, Ber. Deut. Chem. Ges. 1927, 60, 1782.
- [87] Polymer Library, "Styrene-acrylic Polymers", March 16, 2021. Retrieved March 6, 2024 <https://www.mcpolymers.com/library/styrene-acrylic-emulsion-polymers>
- [88] "Phenoplasts". polymerdatabase.com. Retrieved 13 June 2021.
- [89] A. Gardziella, L. A. Pilato, A. Knop, Phenolic Resins: Chemistry, Applications, Standardization, Safety and Ecology, 2nd edition, Springer, 2000.

- [90] J. G. Ferguson, W. E. Grutzner, D. C. Koehler, R. S. Skinner, M. T. Skubiak, and D. H. Wetherell. "No. 1 ESS Apparatus and Equipment". The Bell System Technical Journal. 1964. p. 2417.
- [91] Chempoint, 2024, "Phenolic Resins Solutions for Industrial Applications", accessed on March 25, 2024, from www.chempoint.com
- [92] National Center for Biotechnology Information (2024). PubChem Compound Summary for Polypropylene. Retrieved June 4, 2024, from <https://pubchem.ncbi.nlm.nih.gov/compound/Polypropylene>
- [93] National Center for Biotechnology Information (2024). PubChem Compound Summary for Polyethylene. Retrieved June 4, 2024, from <https://pubchem.ncbi.nlm.nih.gov/compound/Polyethylene>
- [94] Wikipedia, the free encyclopedia, 2024, "Ethylene Vinyl Acetate", accessed on March 25, 2024 from, <https://en.wikipedia.org/wiki/EthyleneVinylAcetate#>
- [95] Wikipedia, the free encyclopedia, 2024, "Polyethylene terephthalate", accessed on March 25, 2024 from, https://en.wikipedia.org/wiki/Polyethylene_terephthalate
- [96] National Center for Biotechnology Information (2024). PubChem Compound Summary for Polyurethane. Retrieved June 4, 2024 from <https://pubchem.ncbi.nlm.nih.gov/compound/Polyurethane>
- [97] National Center for Biotechnology Information (2024). PubChem Compound Summary for Polyisoprene. Retrieved June 4, 2024 from <https://pubchem.ncbi.nlm.nih.gov/compound/Polyisoprene>
- [98] J. R. Dunn, Nitrile Rubbers, Editor(s): K. H. Jürgen Buschow, Robert W. Cahn, Merton C. Flemings, Bernhard Ilschner, Edward J. Kramer, Subhash Mahajan, Patrick Veyssi ère, Encyclopedia of Materials: Science and Technology, Elsevier, 2001, Page 6163, ISBN 9780080431529, <https://doi.org/10.1016/B0-08-043152-6/01095-0>
- [99] Halcyonagri, think rubber think halcyonagri, 2024, "Natural Rubber: Structure and Function", accessed on March 25, 2024, from <https://www.halcyonagri.com/>
- [100] Wikipedia, the free encyclopedia, 2024, "Poly-fluoroethylene", accessed on March 25, 2024 from, <https://en.wikipedia.org/wiki/Poly-fluoroethylene#>
- [101] Wikipedia, the free encyclopedia, 2024, "Polyvinyl Chloride", accessed on March 25, 2024 from, https://en.wikipedia.org/wiki/Polyvinyl_chloride
- [102] Wikipedia, the free encyclopedia, 2024, "Paraffin Wax", accessed on March 25, 2024 from, <https://en.wikipedia.org/wiki/ParaffinWax#>
- [103] Wikipedia, the free encyclopedia, 2024, "Styrene Butadiene", accessed on March 25, 2024 from, <https://en.wikipedia.org/wiki/StyreneButadiene#>
- [104] Wikipedia, the free encyclopedia, 2024, "Neoprene", accessed on March 25, 2024 from, <https://en.wikipedia.org/wiki/Neoprene>
- [105] Wikipedia, the free encyclopedia, 2024, "Polyurethane", accessed on March 25, 2024 from, <https://en.wikipedia.org/wiki/Polyurethane#>
- [106] de Souza, Felipe M., Kahol, Pawan K., Gupta, Ram K., Polyurethane Chemistry: Renewable Polyols and Isocyanates, American Chemical Society, 2021. <https://doi.org/10.1021/bk-2021-1380> ISBN: 9780841298408
- [107] KDO, Kundo Chemicals, "Styrene Acrylic Emulsion", 2024. ", accessed on March 25, 2024 from <https://www.kdochem.com/products/styrene-acrylic-emulsion.html>
- [108] Wikipedia, the free encyclopedia, 2024, "Polyester Resin", accessed on March 25, 2024 from, https://en.wikipedia.org/wiki/Polyester_resin
- [109] Wikipedia, the free encyclopedia, 2024, "Phenol Formaldehyde Resin", accessed on March 25, 2024 from, https://en.wikipedia.org/wiki/Phenol_Formaldehyde_Resin
- [110] Klum House Workshop, "Essential Guide to Waxed Canvas", 2024, ", accessed on March 25, 2024 from, <https://klumhouse.com/blogs/blog/the-ultimate-guide-to-waxed-canvas>