

Treatment of Spilled Auto-Mechanic Garage Oils in Soil Using Polyethylene Terephthalate (PET) Waste Materials

John Stephen Gushit*, Victor Fedoje Oguche, Idoko Ogbe

Department of Science Laboratory Technology, Faculty of Natural Sciences, University of Jos, Jos, Plateau State, Nigeria

Email address:

gushitj@unijos.edu.ng (J. S. Gushit), oguvictor2014@gmail.com (V. F. Oguche), idokoo@unijos.edu.ng (I. Ogbe)

*Corresponding author

To cite this article:

John Stephen Gushit, Victor Fedoje Oguche, Idoko Ogbe. Treatment of Spilled Auto-Mechanic Garage Oils in Soil Using Polyethylene Terephthalate (PET) Waste Materials. *Science Journal of Analytical Chemistry*. Vol. 8, No. 3, 2020, pp. 117-121.

doi: 10.11648/j.sjac.20200803.15

Received: August 9, 2020; Accepted: August 26, 2020; Published: September 3, 2020

Abstract: The work aimed at cleaning oil contaminated soil started with sorting and pulverizing pre-clean high density polyethylene terephthalate (PET) waste materials. The soil samples were collected from *Farin-Gada* Auto-Mechanic village located at Jos North Local Government area, Plateau State-Nigeria. They were prepared by homogenizing, crushing and sieving (mesh size $\leq 2\text{mm}$), then extracted and purified for characterization of the total petroleum hydrocarbon (TPH) using gas chromatography mass spectroscopy (GCMS). For the heavy metals, the soil samples were air-dried, digested using mineral acids (HNO_3 and HCl) in appropriate proportion, then analyzed using atomic absorption spectrophotometer (AAS). The levels of nickel (Ni), lead (Pb), chromium (Cr), cadmium (Cd) and TPH were assessed in the sample used as control (uncontaminated) labelled as 'CC-S'. Untreated soil (automobile mechanic garage soil) labelled 'UT-S', and treated soil labelled as 'TT-S'. The results revealed that the untreated soil (UT-S) had high contaminants when compared to that of CC-S and TT-S. This suggest that anthropogenic activities is the major source of the soil contamination. On treating the contaminated soil with PET, the concentration of Ni, Pb, Cr and Cd in the UT-S was reduced by 18%, 4%, 84% and 66% respectively. Similarly, the total petroleum hydrocarbon (TPH) concentration reduced from 0.271 mg kg^{-1} to 0.082 mg kg^{-1} on treating UT-S with PET. The present work has established that pulverized waste polyethylene terephthalate (PET) can be processed and used to clean up oil contaminated soils.

Keywords: Treatment, Oil Contaminated Soil, Polyethylene Terephthalate (PET), Heavy Metals, Total Petroleum Hydrocarbon (TPH)

1. Introduction

Crude oil products are one of the common environmental contaminants/pollutants, and its spillage has a hazardous effect on both plants and animals living within the natural environment. However, the current rapid rate of industrialization, urbanization [1] and economic activities like mining [2], agriculture [3], industries and transportation [4, 5], can lead to contamination of environmental resources due to huge amount of waste they generate. For instance, gasoline, battery manufacture, metal plating, smelting, tanneries, petroleum refining, paint manufacture, pesticide, cosmetics, ceramics, pigment manufacture, printing and photographic industries, etc., are sources of 0 heavy metals such as cadmium, zinc, copper, nickel, lead, mercury, cobalt,

manganese and chromium [6].

Also, spills from used automobile oils, worn machinery, used batteries, organic and inorganic chemicals used in oil as additives also release different heavy metals [7], and these heavy metals enter the environment through bio-magnifications in food chains [8]. Once these toxic substances penetrate into the ground, they have the capacity to pose a wide range of adverse environmental problems [9, 10]. For instance, a study [11] confirmed that garage and automotive workers are in danger of impending lead toxicity and facing abdominal colic, constipation, and central nervous system dysfunction. Other studies [12, 13] further confirmed that plants and leafy vegetables grown using wastewater and

polluted soil can accumulate toxic heavy metals above maximum limit [14], causing serious risk to human health when consumed [15].

In recent times, Shashemane City is characterized as one of the fastest growing cities and center of business in Oromia region. This will lead to rapid increase in automobile garage villages, and the implication of this is releases of different types of used lubricants and oil related pollutants that have significant potential impact into the environmental sectors [16] undertaking different operational activities. Mindful of the impact of activities in garages, an investigation [11] on impact of exposure to lead (Pb) by garage workers which relates to a similar study [13] in which it was discovered the effects of oil spills are not limited to the immediate environment alone. The immediate effects on humans, fish, animals, birds and wildlife in general, mainly are due to; direct contact with the spilled oil including breathing of volatilized oil components from the spillage, direct contact with the environment polluted with spilled oil components, such as drinking polluted water or breathing polluted dust particles and consumption of polluted food at any level within the food chain, with a higher risk for food pollution at the higher levels of the food chain i.e. humans and animals. Hence, the need to clean contaminated soils, that inform the need for this work which aims to prepare as readily available waste materials to treat soil polluted by used oil and lubricants.



Figure 1. Pulverized high density PET materials.

2. Materials and Experiments

2.1. Study Area

Jos North is located in the Northern part of Plateau State situated between Latitudes $9^{\circ}56'21.7''$ (9.9394°N) and Longitudes $8^{\circ}5'8''$ (8.9022°E), elevation 1,200 meter (3,937 feet). The mechanic garage village being studied is located along *Farin-Gada* Jos North Local Government, Plateau State, Nigeria (Figure 2). It covers a large span of land, a busy area where automobile repairs and maintenance are carried out and serves as the major mechanic workshop for the Jos metropolis and other neighboring Local Governments and States [18]. Soil exposed to petroleum hydrocarbon and heavy metal contamination due to industrials activity and transportation was collected at different depth of (0.5m and 1.0m) from the automobile repair workshops close *Farin-Gada* Market.

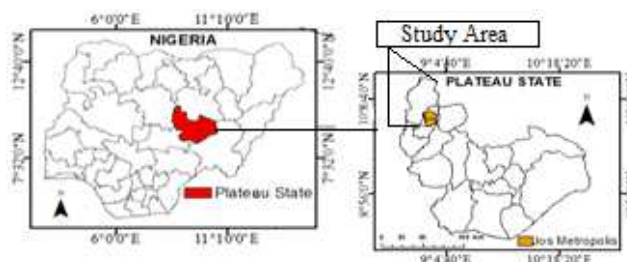


Figure 2. Location of the study area.

2.2. Sampling Area

The study was done by obtaining samples from *Farin-Gada* Auto-Mechanic Village, Jos North Local Government area in Plateau State-Nigeria. It is a densely populated area where commercials maintenance of vehicles and other automobiles are done. It is located on latitude $9^{\circ}56'21.7''\text{North}$ and longitude $8^{\circ}54'8''\text{East}$ of Greenwich meridian. The soil samples site location were recorded using a Geographical Positioning System (GPS), which provides precise location of the research area [19].

2.3. Soil Samples Collection

The soil samples were collected with the aid of a stainless steel sampling auger at different depth in amber bottles, that had been properly cleaned before soaking in 10% nitric acid and rinsed with distilled water. The sampling auger was washed with distilled water each time it is used for collection of sample before using it to collect another samples. Samples were then transported to the laboratory in clean plastic coolers and stored in the chiller awaiting analysis.

2.4. Sample Treatment Using the Pulverized PET Material

A reasonable quantity of high density polyethylene terephthalate (PET) waste polymeric bottles with properties earlier identified (Table 3) [20] were collected and clean before pulverizing into powder (mesh size $\leq 2.00\text{mm}$) using the Cryo-milling technique under specified conditions [17]. It was also tested to ascertain the safety usage of the PET rubber, and to ensure that all PET rubber used does not serve as a contaminating agent other than the purpose it was employed for [21]. 50g of the polluted soil sample and 10g of the pulverized material (PET powder) was measured into 200ml of distilled water in a 500ml beaker. On stirring, the processed PET absorbed the oil contaminants which are hydrocarbon in nature, then scooped. A portion of the soil left was dried and digested for heavy metals analysis, while the second portion was used for Total Petroleum Hydrocarbon (TPH) analysis. The material used in this research work was polymeric materials that had been properly cleaned by soaking in 3% nitric acid, thereafter rinsed with distilled water.

2.5. Heavy Metals Analysis

The dried soil samples were ground and sieved through $\leq 2\text{mm}$ mesh-sized sieve mesh. 1.00g of each of the sieved sample was weighed into an Erlenmeyer flask, and 100ml of

distilled water added. 0.5ml of Nitric acid (HNO_3) and 5ml of Hydrochloric acid (HCl) was added in the ratio of 1:10 and swirl vigorously. This was heated to digest until it became clear. The resulting solution was filtered through what-mann filter paper into a 100ml volumetric flask. The samples were turned into 100ml plastic bottles and analysed using Atomic Absorption spectrophotometer (Perkin-Elmer, Model 2380).

2.6. Total Petroleum Hydrocarbon (TPH) Analysis

The wet soil sample was air-dried and homogenized, after which the sample was crushed and filtered. 10.00g portion of the sample was weighed into the brown laboratory amber bottles. Thereafter 10ml of a mixture of Dichloromethane (DCM) and Acetone in the ratio of 1:1 added to the sample. A known concentration of O-terphenyl standard was also measured into the sample to help spike the samples. The mixture were further agitated using the vortex mixer for 20 minutes. This was then filtered using whatmann filter papers on a reasonable amount of anhydrous sodium sulphate (Na_2SO_4). The samples were then collected and further filter through a micro column packed with cotton wool and silica gel powder (60-120 mesh size). Anhydrous sodium sulphate (Na_2SO_4) was further added on the silica gel inside the column as drying agent before the sample was passed through it. The purified samples were finally concentrated to 3ml before detecting them using Gas Chromatography-Mass Spectroscopy (GC-MS).

3. Result and Discussion

Heavy Metals and TPH concentrations in the Control

Table 1. Heavy Metal concentration ($X \pm SD$) (mg/kg) in the Control (CC-S), Untreated (UT-S) and Treated (TT-S) Soil Samples.

Sample Code	Ni	Pb	Cr	Cd
CC-S	0.025 \pm 0.04	0.080 \pm 0.08	0.090 \pm 0.06	0.002 \pm 0.02
UT-S	0.039 \pm 0.01	0.206 \pm 0.03	1.280 \pm 0.14	0.009 \pm 0.06
TT-S	0.032 \pm 0.04	0.198 \pm 0.06	0.199 \pm 0.17	0.003 \pm 0.01
Quantity Removed	0.007	0.008	1.081	0.006
% Removed	18.00	04.00	84.00	66.00

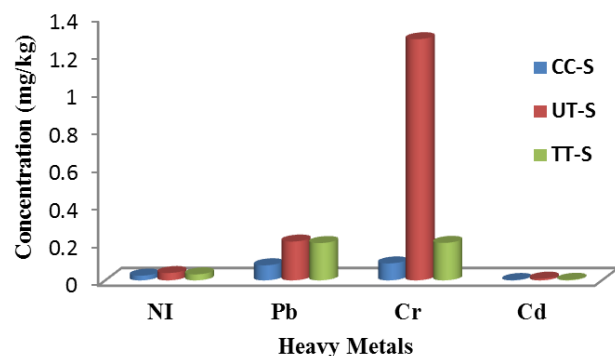


Figure 3. Heavy Metals Concentration (mg/kg) in Control (CC-S), Untreated (UT-S) and Treated (TT-S) Soil Samples.

3.2. Total Petroleum Hydrocarbon (TPH) Concentrations

From this work, the total petroleum hydrocarbon (TPH) concentration lies between 0.002-0.174 mg kg^{-1} in the

(CC-S), Untreated (UT-S) and Treated samples (TT-S) are shown in Tables 1 and 2, with their corresponding graphs in Figures 4 and 5. Similarly, the TPH spectra of the TT-S and UT-S extracts are indicated in Figure 6 obtained by direct infusion of the purified extracted sample into the Gas Chromatography Mass Spectrometer (GC-MS).

3.1. Heavy Metals And Total Petroleum Hydrocarbon Concentrations

The Control (CC-S), Treated (TT-S) and Untreated (UT-S) soil samples under investigation revealed varying concentrations of all the four heavy metals (Ni, Pb, Cr, and Cd) analyzed. The concentrations were in the range of 0.025-0.039 mg kg^{-1} for Ni, 0.080-0.206 mg kg^{-1} for Pb, 0.090-1.280 mg kg^{-1} for Cr and 0.002-0.009 mg kg^{-1} for Cd as shown in Table 1. The relatively unpolluted soil (from a conserved area within University of Jos) representing the 'Control sample' showed a concentration of 0.025 mg kg^{-1} 0.080 mg kg^{-1} 0.090 mg kg^{-1} , and 0.002 mg kg^{-1} for Ni, Pb, Cr and Cd respectively. While for the polluted area, which represent untreated soil (automobile mechanic garage soil) labelled 'UT-S' had the concentration of Ni, Pb, Cr and Cd to be 0.039 \pm 0.01, 0.206 \pm 0.03, 1.280 \pm 0.14 and 0.009 \pm 0.06 mg kg^{-1} respectively. On treating the soil, the concentrations of all these metals reduced significantly. From this, the concentrations of Ni and Pb reduced by 18% and 4.00% respectively. Higher reduction was observed in Cr with 84% and Cd with 66% (Table 1 & Figure 3). This suggest the treatment method used in this research is effective and can even be adopted at a larger scale to treat similar oil contaminated soils.

auto-mechanic garage contaminated soil (UT-S). This is quite low when compared with range for a similar work of 486 to 4,438.7 mg kg^{-1} at 0–15 cm depth reported in a similar work [22]. From this, there is a ray of hope as the relatively low concentration obtained in this work will pave way to regulate the contamination before it gets out of place, even though it is slightly higher than the TPH concentration of 0.002-0.153 mg kg^{-1} present in the control sample (CC-S). Giving the trends of contamination widely reported in other places and sites involved in related activities. For instance, and earlier work [23] reported TPH concentrations at Petrol Stations had minimum of 399.83 \pm 106.19 and maximum of 450.83 \pm 90.58 mg kg^{-1} and Mechanic workshops with 362.60 \pm 185.84 and 428.55 \pm 119.00 mg kg^{-1} . This research employed a treatment approach that used high density PET to treat the contaminated soil (UT-S) from which the treated sample (TT-S) significantly recorded a low concentration of 0.081 mg kg^{-1} (Table 2 and Figure 5).

Table 2. Profile and concentration (mg/kg) of TPH in the Control (CC-S),

Untreated (UT-S) and Treated (TT-S) Soil Samples.

Compounds	CC-S	UT-S	TT-S
Decane	0.002	0.004	0.002
Undecane	0.002	0.001	0.000
Tridecane	0.001	0.002	0.001
Tetradecane	0.008	0.010	0.000
Pentadecane	0.004	0.008	0.002
Hexadecane	0.001	0.001	0.000
Heptadecane	0.002	0.003	0.001
2,6,10,14-tetramethyl-pentadecane	0.001	0.000	0.000
1,2-dimethyl-cyclooctane	0.153	0.175	0.046
Octadecane	0.022	0.036	0.003
Nonadecane	0.001	0.007	0.005
Eicosane	0.001	0.003	0.002
Heneicosane	0.007	0.013	0.008
Hexacosane	0.002	0.008	0.007
Tetracosane	0.001	0.002	0.002
Octacosane	0.000	0.000	0.002
9-octyl-Heptadecane	0.000	0.001	0.000
7-hexyl-Docosane	0.000	0.000	0.001

Table 3. Properties of PET used.

Property	Value
Density	0.93 to 0.97 g/cm ³
Chemical Property	Inert
Heat Resistant	>100°C
Melting Point	135°C

Source [20].

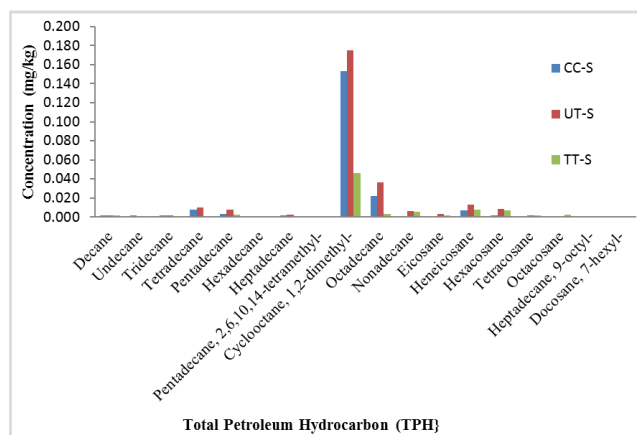


Figure 4. TPH's Concentration (mg/kg) in Control (CC-S), Untreated (UT-S) and Treated (TT-S) Soil Samples.

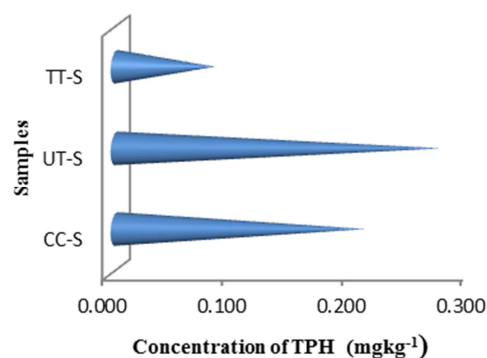


Figure 5. Summary Concentration of THP in Control (CC-S), Untreated (UT-S) & Treated (TT-S) Samples.

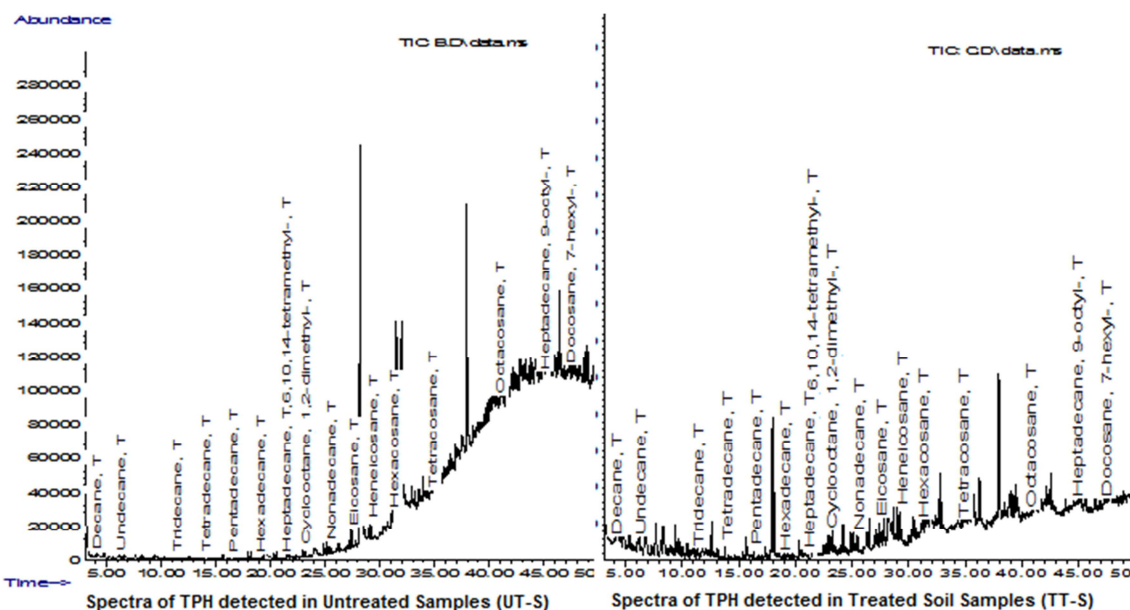


Figure 6. Spectra for the direct infusion of Treated (TT-S) and Untreated Soil Samples (UT-S).

4. Conclusion

Pulverized high density polyethylene terephthalate (PET) waste bottles used for cleaning oil and lubricant contaminated soil was found to be effective, as considerable quantity of pollutants like

TPH were removed from the contaminated soil by 70%. While heavy metals like Cr and Cd were significantly cleaned up by 84% and 66% respectively. This goes on to give positive indication that waste PET materials instead of being environmental nuisance, can be processed to clean up these categories of pollutants in oil

polluted soils. In addition, to deal with the problem from the root, it is advisable that all automobile repairs done in different cities be restricted to mechanic villages, to enhance ease of collection, preservation, recycling and re-use of spent oils. This will put an end to indiscriminate disposal of spent automobile oils which results in excessive pollution of topsoil.

Acknowledgements

We are grateful to the Department of Chemistry and Science Laboratory Technology of University of Jos for allowing us have free access to their laboratory facilities to conduct this research.

References

- [1] Jiang, M., Zeng, G., Zhang, C., Ma, X., Chen, M., Zhang, J., Lu, L., Yu, Q., Hu, L., & Liu, L. (2013). Assessment of heavy metal contamination in the surrounding soils and surface sediments in Xiawangang River, Qingshuitang District. *PLoS One* 8 (8): e71176. doi: 10.1371/journal.pone.0071176.
- [2] Navarro, M., Pérez-Sirvent, C., Martínez-Sánchez, M., Vidal, J., Tovar, P. and Bech, J. (2008). Abandoned mine sites as a source of contamination by heavy metals: a case study in a semi-arid zone. *Journal of Geochemical and Exploration*, 96 (2-3): 183-193.
- [3] Vaalgamaa, S. and Conley, D. (2008). Detecting environmental change in estuaries: nutrient and heavy metal distributions in sediment cores in estuaries from the Gulf of Finland. *Baltic Sea. Estuarine Coast Shelf Science*, 76 (1): 45-56.
- [4] Jaradat, Q., Masadeh, A., Zaitoun, M. and Maitah, B. (2005). Heavy metal contamination of soil, plant and air of scrapyard of discarded vehicles at Zarqa City, Jordan. *Soil Sediment Contaminations*, 14: 449-462.
- [5] David, O. and Sunday, A. (2012). Assessment of vehicular pollution of road side soils in Ota metropolis, Ogun State, Nigeria. *International Journal of Civil and Environmental Engineering*, 12 (4): 40-46.
- [6] B. J. Alloway, Soil pollution and land contamination. In: Harrison RM (ed) *Pollution: causes, effects and control*. The Royal Society of Chemistry, Cambridge, 1995, pp 318.
- [7] European Environment Agency (EEA) (2007). Progress in management of contaminated sites (CSI 015). EEA. Assessment Published July 2005; Kongenytov, 6DK-1050, Denmark. <http://www.eea.europa.eu>.
- [8] H. Bradl, Heavy metals in the environment: origin, interaction and remediation. Elsevier Academic press, London, 2005, pp. 1-282.
- [9] Tamene, F. D. (2008) Assessment of lead toxicity awareness among battery charging garage and workshop workers and levels of lead in piped drinking water of Addis Ababa, Ethiopia. <http://etd.aau.edu.et/dspace/items-by-author=Tamene%2C+Fite>
- [10] Cai, J., Cao, Y., Tan, H., Wang, Y. and Luo, J. (2011). Fractionation and ecological risk of metals in urban river sediments in Zhongshan City, Pearl River Delta. *Journal of Environmental Monitoring*, 13 (9): 2450-2456.
- [11] Adela, Y., Ambelu, A. and Tessema, D. (2012). Occupational Lead exposure among automotive garage workers a case study for Jimma town. *Journal of Occupation and Medical Toxicology*, 7 (1), 15: 1-8.
- [12] Naser, H., Sultana, S., Mahmud, N., Gomes, R. and Noor, S. (2011). Heavy metal levels in vegetables with growth stage and plant species variation. *Bangladesh Journal of Agricultural Resources*, 36 (4): 563-574.
- [13] Itanna, F. (2002). Metals in leafy vegetables grown in Addis Ababa and toxico-logical implications. *Ethiopia Journal of Health and Development*, 16 (3): 295-302.
- [14] FAO (1985). Water quality for agriculture Irrigation Drain, 29 (1): 1-120.
- [15] Akinola, M. O., Njoku K. L. and B. E. Ekeifo (2008). Determination of lead, cadmium and chromium in the tissue of an economically important plant grown around a textile industry at Ibeshe, Ikorodu area of Lagos State, Nigeria. *Advances in Environmental Biology Journal*, 2: 25-30.
- [16] Adie, G. U. and Osibanjo, O. (2009). Assessment of soil pollution by slag from an automobile battery manufacturing plant in Nigeria. *Africa Journal of Environmental Science and Technology*, 3 (9): 239-250.
- [17] Giri, A., Kellogg, F., Cho, K. and Pepi, M. (2014). Powder Production from Waste Polyethylene Terephthalate (PET) Water Bottles. *Army Research Laboratory*, pg. 1-14.
- [18] F. O. Apeh (2018). "Termite (*Infraorder Isoptera*) As Bio-indicators Of Heavy Metal Pollution in the Environment". Department of Science Laboratory Technology, Faculty of Natural Sciences, University of Jos (Unpublished).
- [19] Sankaran, S., S. Sonkamble, K. Krishnakumar and N. C. Mondal (2012). Integrated approach for demarcating subsurface pollution and saline water intrusion zones in SIPCOT area: a case study from Cuddalore in Southern India. *Environmental Monitoring and Assessment*, 184: 5121-5138.
- [20] <https://www.usetute.com.au/polythen.html>
- [21] Dutra, C., M. T. de Alvarenga Freire, C. Nerin, K. Bentayeb, A. Rodriguez-Lafuente, M. Aznar and F. G. R. Reyes (2014). Migration of residual nonvolatile and inorganic compounds from recycled post-consumer PET and HDPE. *Journal of the Brazilian Chemical Society*, 25 (4): 686-696.
- [22] Chukwujindu, M. A., E. S. Iwegbue and G. E. W. Nwajei (2008). Characteristic levels of total petroleum hydrocarbon in soil profiles of automobile mechanic waste dumps. *International Journal of Soil Science*, 3 (1): 48-51.
- [23] Adeniyi, A. A. and J. A. Afolabi (2002). Determination of total petroleum hydrocarbons and heavy metals in soils within the vicinity of facilities handling refined petroleum products in Lagos metropolis. *Environ International*, 28 (1-2): 79-82.